

TECHNICAL SPECIFICATIONS

Capella® Plus w/Integral Skirt Whirlpool Bath

CPS6060 WCF 2CJ

Capella Plus with Integral Skirt Whirlpool Bath
Left Hand (EN10)



INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

KEY DIMENSIONS

DIMENSIONS

60" L x 60" L x 20-1/2" H

(1524 mm) L x (1524 mm) L x (521 mm) H

DRAIN/OVERFLOW

A: 18" (457 mm) B: 12-1/8" (308 mm)

CUTOUT

Not Applicable

TOTAL WEIGHT

1180 lb (535 kg) / 47 lb/ft² (229 kg/m²)

OPERATING GALLONAGE

MIN: 55 U.S. gal (208 liters)

MAX: 90 U.S. gal (341 liters)

PRODUCT WEIGHT

130 lb (59 kg)

SKIRT MOUNTING

Integral

ELECTRICAL SPECIFICATIONS

Requires a dedicated GFCI protected separate circuit.

Motor/Pump: 120 VAC, 15 AMP, 60 Hz.

RapidHeat™: 120 VAC, 15 AMP, 60 Hz.


HEATER (STANDARD)

Requires a dedicated GFCI protected separate circuit.


RapidHeat™: P/N S750000

FEATURES, UPGRADES & ACCESSORIES


- Center Drain Location
- Accessories / Hardware:
 - Trip-Lever Drain Kit #X559
 - Rotary Drain Kit, 26" Cable #8730
 - TheraPro™ Jet Rings Kit #D095
 - AccuPro™ Jet Rings Kit #P556 (3 kits required)
- Trim Kit Finishes Available:
 - (827) – Chrome
 - (826) – Brushed Nickel
 - (845) – Oil Rubbed Bronze

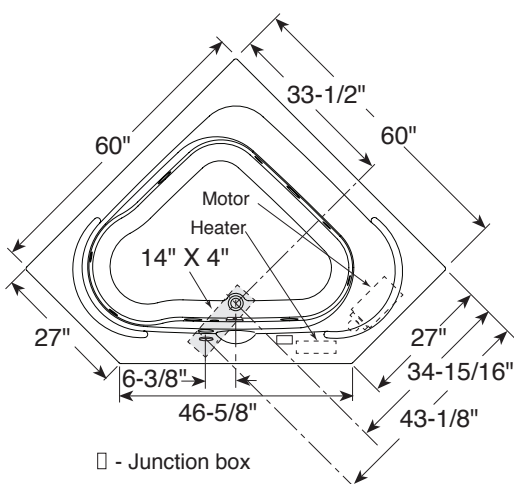


Product Shown: Capella Left Hand Motor Plus with Integral Skirt Whirlpool Bath LH Model: EN00 * Measurements inside unit represent cutout in floor to allow for drain/overflow.

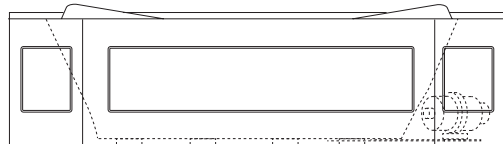

FRONT VIEW

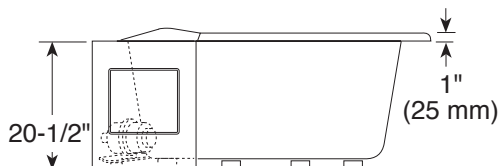

SIDE VIEW



DRAIN/OVERFLOW