



MONET[®] COMFORT BATHS[™]

INSTALLATION/OPERATING INSTRUCTIONS

SUMMARY OF PRECAUTIONS

- Never operate electrical appliances (hairdryer, telephone, television, radio etc.) inside or within 5 feet of the bath.
- Never leave small children unattended in the bath.
- When cleaning your bath, do not use abrasive substances which will damage the bath's surface.
- A **maximum** water temperature of 104°F (40°C) is recommended. Bathing at temperatures above 104°F (40°C) for prolonged periods can be injurious to health.
- To prevent discoloration of the acrylic finish, do not fill the bath with water in excess of 140°F.

IMPORTANT SAFETY INSTRUCTIONS

WARNING: When using this unit, basic precautions should always be followed, including the following:

Read and follow all instructions.

DANGER: to reduce the risk of injury, do not permit children to use this unit unless they are closely supervised at all times.

Use this unit only for its intended purpose as described in this manual. Do not use attachments not recommended by the manufacturer.

Never drop or insert any object into any opening.

This unit must be connected only to a supply circuit that is protected by a ground fault circuit interrupter (GFCI). Such a GFCI should be provided by the installer and should be tested on a routine basis. To test the GFCI, push the test button. The GFCI should interrupt power. Push the reset button. Power should be restored. If the GFCI fails to operate in this manner, there is a ground current flowing, indicating a possibility of an electric shock. Do not use this unit. Disconnect the unit and have the problem corrected by a qualified service representative before using.

A pressure wire connector is provided on the exterior of motor to permit connection of an No. 8 AWG (8.4 mm) solid copper bonding conductor between this unit and all other electric equipment and exposed metal in the vicinity, as needed to comply with local requirements.

WARNING: When using electrical products, basic precautions should always be followed including the following:

DANGER: RISK OF ELECTRIC SHOCK. Connect only to a circuit protected by a ground fault circuit interrupter. Grounding is required. This unit should be installed by a qualified service representative and grounded.

(For built-in and custom units.) Install to permit access for servicing.

CONTENTS

Specifications _____	2-3
Roughing-in Reference _____	4-5
Framing and Support _____	5
Service Access _____	6
Electrical Connections _____	6
Plumbing and Water Supply _____	7
Operation _____	7
Warranty _____	9-10

Save These Instructions for Future Use.

Owner's Record

Date Purchased _____

Purchased From _____

Installed By _____

Serial Number _____

Model _____


Important: Read complete instructions before beginning installation.

Each comfort bath arrives ready for installation, completely equipped with blower motor and plumbing necessary for operation. An optional drain/overflow kit is available for installation on the bath.


Remove the bath from the carton. Retain the shipping carton until satisfactory inspection of the product has been made. **Do not lift the bath by the plumbing at any time; handle by the shell only.**

Immediately upon receipt, inspect the shell before installing. Should inspection reveal any damage or defect in the finish, do not install the bath. Damage or defect to the finish claimed after the bath is installed is excluded from the warranty. The Company's responsibility for shipping damage ceases upon delivery of the products in good order to the carrier. Refer any claims for damage to the carrier. For definitions of warranty coverage and limitations, refer to the published warranty information packed with the product.


All bath units are factory tested for proper operation and watertight connections prior to shipping. **Note: Prior to installation, the bath must be filled with water and operated to check for leaks that may have resulted from shipping damage or mishandling.** The Company is not responsible for any defect that could have been discovered, repaired, or avoided by following this inspection and testing procedure.

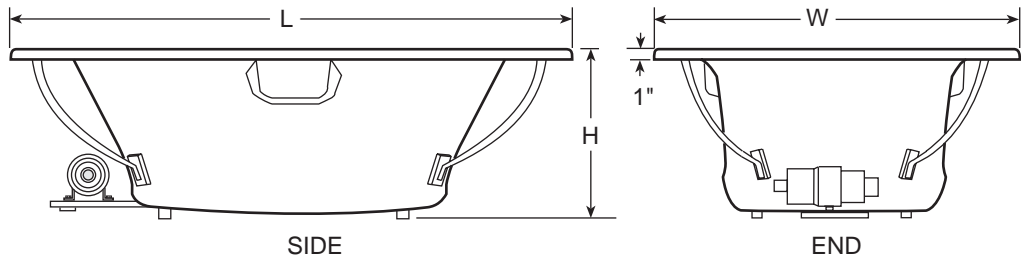


**ARIELLE
6042B**

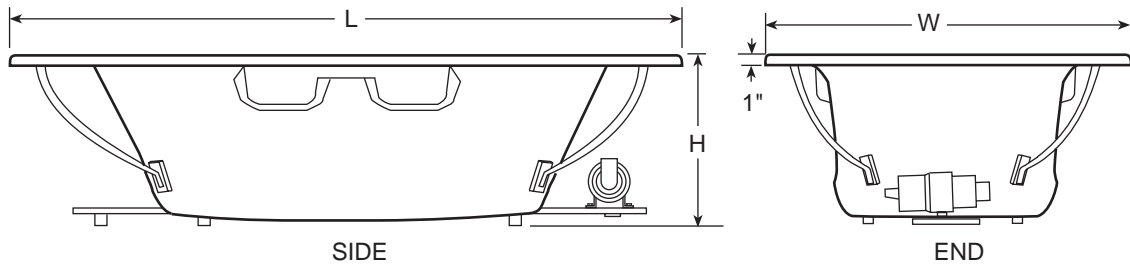

**BRIELLE
7242B**

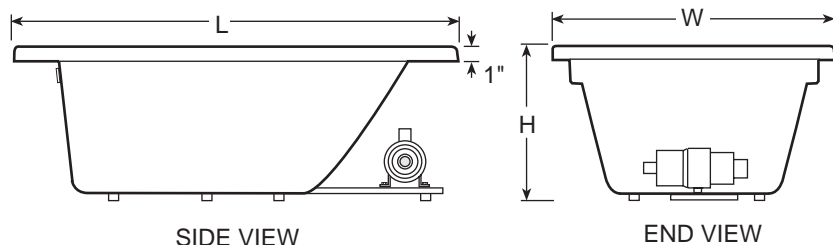

**LUSANT
6032B**




DRAIN/OVERFLOW

SPECIFICATIONS (Rectangular)

MODEL	DIMENSIONS	DRAIN/OVERFLOW DIMENSIONS	CUTOUT	TOTAL WEIGHT/ FLOOR LOADING	MINIMUM OPERATING GALLONAGE	PRODUCT WEIGHT	SKIRT & MOUNTING
ARIELLE™ 6042B	59-1/2" (1511 mm) L 41-1/2" (1041 mm) W 21-1/4" (540 mm) H	17" (431 mm) A 8-1/4" (210 mm) B	58" x 40"	776 lb (353 kg)/ 45 lb/sq. ft. (220 kg/sq. m)	18 U.S. gal (68 liters)	76 lb (35 kg)	Not Available
BRIELLE™ 7242B	71-5/8" (1819 mm) L 41-5/8" (1057 mm) W 19" (483 mm) H	14" (356 mm) A 9-3/4" (248 mm) B	70"x42"	796 lb (362 kg)/ 39 lb/sq. ft. (190 kg/sq. m)	18 U.S. gal (68 liters)	96 lb (44 kg)	Not Available
LUSANT™ 6033B	60" (1524 mm) L 32" (813 mm) W 20" (508 mm) H	15-5/8" (397 mm) A 7" (178 mm) B	58"x30"	701 lb (319 kg)/ 43 lb/sq. ft. (210 kg/sq. m)	18 U.S. gal (68 liters)	70 lb (32 kg)	Not Available

FOR ALL UNITS: ELECTRICAL REQUIREMENTS: 115 VAC, 15 AMP, 60 Hz. Requires dedicated separate circuit.


OVAL BATHS

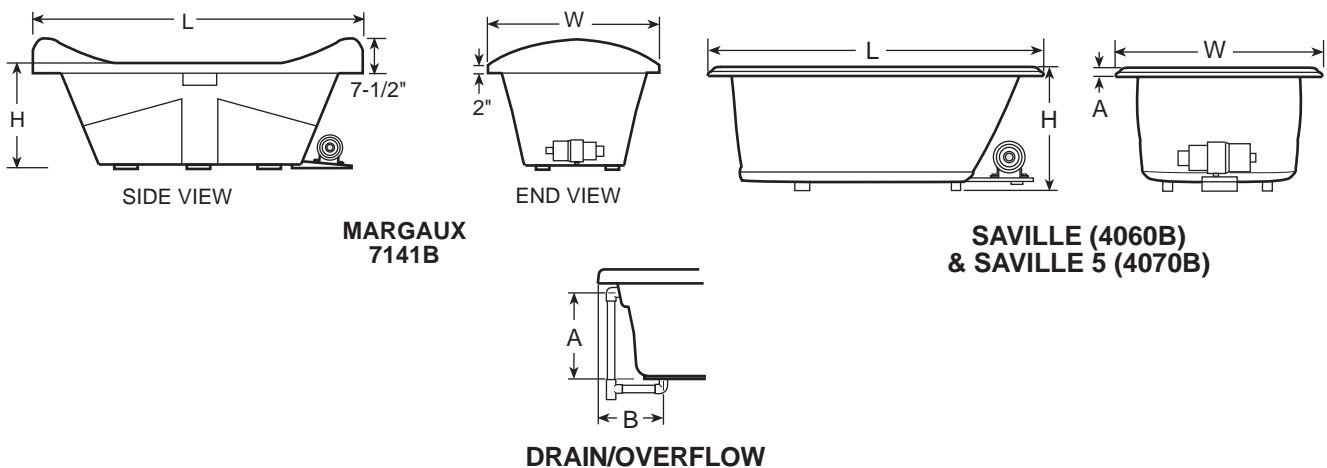

SPECIFICATIONS (Oval)

MODEL	DIMENSIONS	DRAIN/OVERFLOW DIMENSIONS	CUTOUT	TOTAL WEIGHT/ FLOOR LOADING	MINIMUM OPERATING GALLONAGE	PRODUCT WEIGHT	SKIRT & MOUNTING
MARGAUX™ 7141B	72" (1829 mm) L 42" (1067 mm) W 23-3/4" (603 mm) H	20-1/8" (511 mm) A 11-3/4" (299 mm) B	Template Provided	860 lb (391 kg)/ 41 lb/sq. ft. (200 kg/sq. m)	18 U.S. gal (68 liters)	135 lb (55 kg)	Not Available
SAVILLE™ 5 4060B	60" (1524 mm) L 42" (1067 mm) W 21-3/8" (543 mm) H 1-5/8" (41 mm) A	15-3/4" (400 mm) A 10" (254 mm) B	Template Provided	718 lb (326 kg)/ 44 lb/sq. ft. (215 kg/sq. m)	18 U.S. gal (68 liters)	76 lb (35kg)	Not Available
SAVILLE™ 4070B	69" (1753 mm) L 42" (1057 mm) W 22-1/4" (565 mm) H 2-1/4" (57 mm) A	15-3/4" (400 mm) A 10" (254 mm) B	Template Provided	840 lb (382 kg)/ 42 lb/sq. ft. (205 kg/sq. m)	18 U.S. gal (68 liters)	98 lb (45 kg)	Not Available

FOR ALL UNITS: ELECTRICAL REQUIREMENTS: 115 VAC, 15 AMP, 60 Hz. Requires dedicated separate circuit.

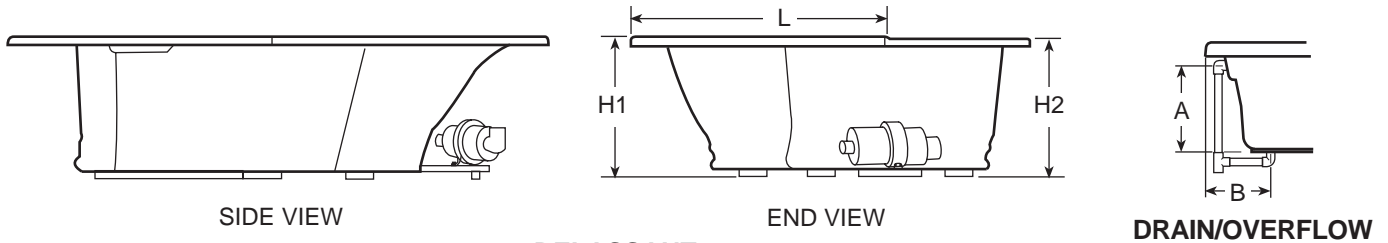


**DELASSANT
6262B**

SPECIFICATIONS (Corner)


MODEL	DIMENSIONS	DRAIN/OVERFLOW DIMENSIONS	CUTOUT	TOTAL WEIGHT/ FLOOR LOADING	MINIMUM OPERATING GALLONAGE	PRODUCT WEIGHT	SKIRT & MOUNTING
DELASSANT™ 6262B	60" (1524 mm) L 60" (1524 mm) L 21-5/8" (549 mm) H1 21-1/4" (533 mm) H2	16-5/8" (422 mm) A 10" (254 mm) B	See Below	1097 lb (499 kg)/ 55 lb/sq. ft. (268 kg/sq. m)	18 U.S. gal (68 liters)	122 lb (56 kg)	Not Available

FOR ALL UNITS: ELECTRICAL REQUIREMENTS: 115 VAC, 15 AMP, 60 Hz. Requires dedicated separate circuit.


ROUGHING-IN REFERENCE

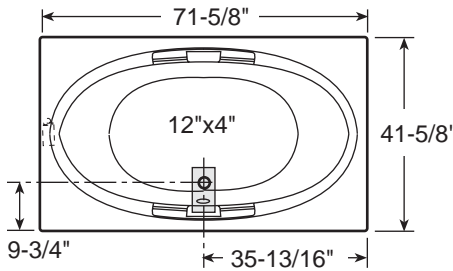


**BRIELLE
7242B**

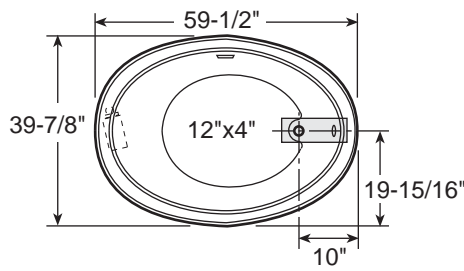


**SAVILLE 5
4060B**

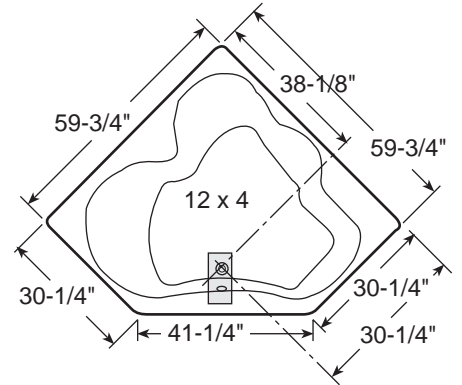


**DELASSANT
6262B**

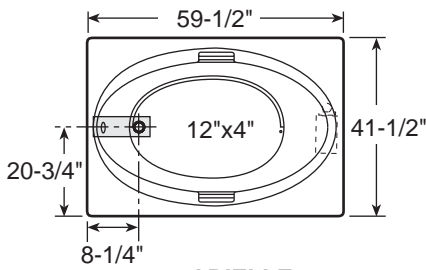


**ARIELLE
6042B**

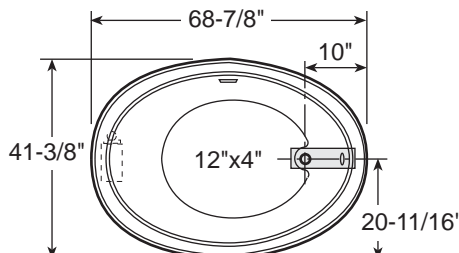

**SAVILLE
4070B**

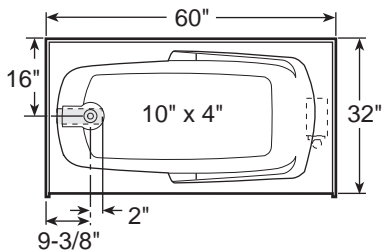


**LUSANT
6032B**

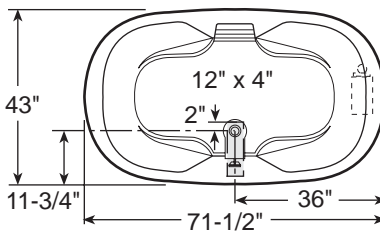

**MARGAUX
7141B**

Note: 1. Measurements inside each unit represent cutout in floor to allow for drain/overflow.
2. Saville 5 4060B, Saville 4070B and Margaux 7141B have been provided with cutout templates.

BATH CUTOUT

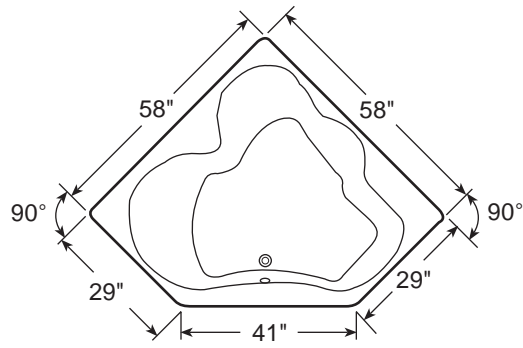

**DELISSANT
6262B**

Framing and Support


The optional drain/overflow of the bath extends below the bottom of the bath. Note that this requires a cutout in the floor.

The floor structure beneath the bath must be able to support a total weight of bath, water, and bather. Refer to the table under total weight for your model. If the subfloor is level, no other preparation is necessary. You can proceed to install the bath. If the subfloor is not level, you **MUST** level the entire surface prior to installing the bath. (Use a floor leveling compound.) Mortar, plaster or minimal expansion structural foam can be used to set the bath, however the bath must remain level in order for it to drain properly and the foam feet must make full contact with the mortar, plaster or structural foam foundation. (The bath must be supported as outlined above.) Both sides of a joint or splice of subfloor should be level to each other.

The rim of the bath is not designed to support weight. If finish material is to overlap or contact the bath, the added weight must be fully self-supporting.

Install optional trim parts when all installation has been completed.

TYPICAL INSTALLATIONS

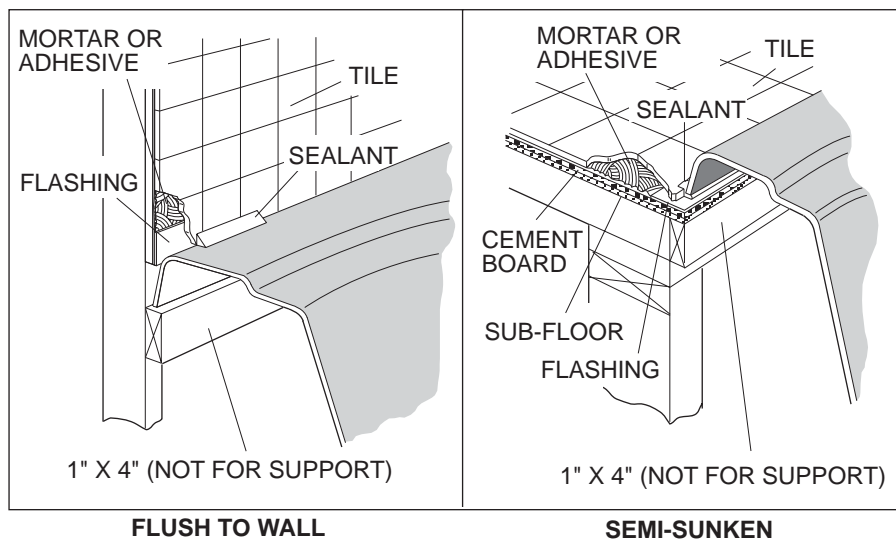


Service Access


For partially or fully sunken installations, allow for access to service connections. It is the installer's responsibility to provide sufficient service access. The recommended minimum dimensions allowable for service to the bath are shown in the "Service Access" illustrations.

Provide adequate ventilation (minimum 30 square inch opening) for cooling the motor and to supply sufficient air for the blower.

SERVICE ACCESS

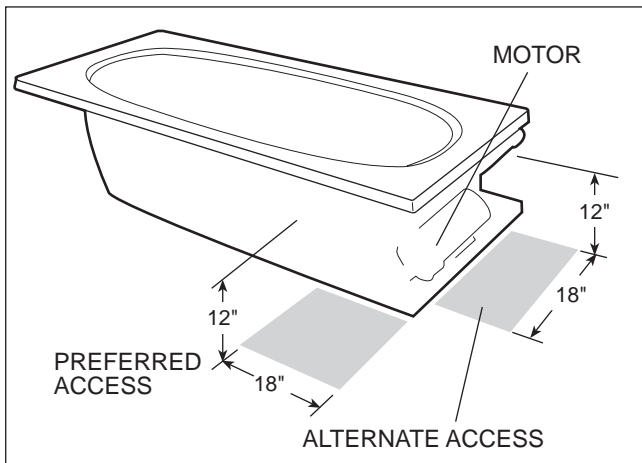

SERVICE ACCESS (CORNER BATH)

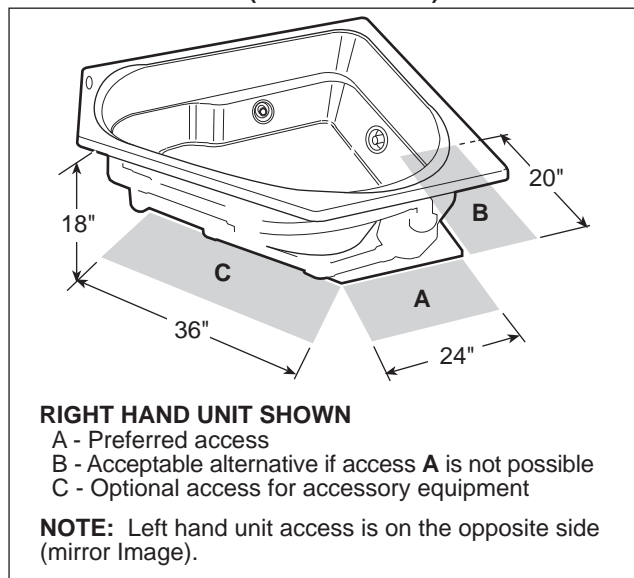


Electrical Connections


A separate circuit, which must be protected by a Ground Fault Circuit Interrupter (GFCI), is required. Install a duplex outlet to the studwall underneath the bathtub, at least 4 inches above the floor. The duplex outlet is not provided.

DANGER: RISK OF ELECTRIC SHOCK. Connect only to a circuit protected by a Ground Fault Circuit Interrupter.

ELECTRICAL CONNECTION

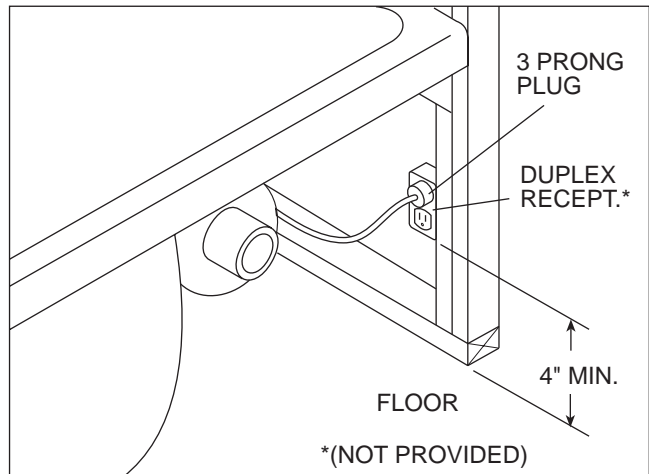

ELECTRICAL CONNECTION (FOR CORNER BATHS)

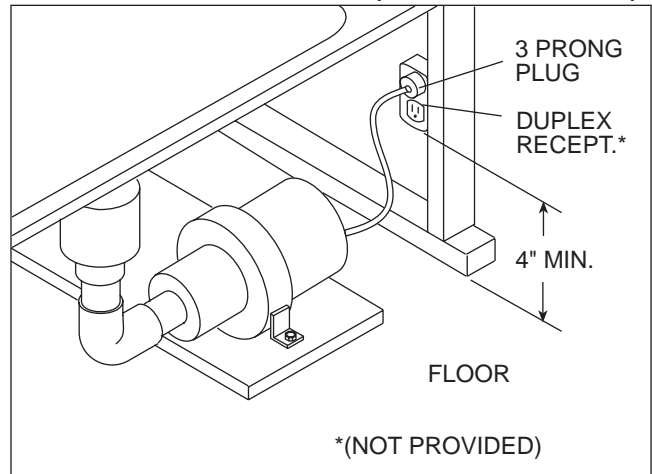

Drain Information

A drain/overflow assembly (sold separately) must be installed on the bath, water tested, and connected to the sanitary system of the house. After opening the carton, inspect for damage and verify that the kit is of the proper finish. Follow the installation instructions provided with the drain/overflow kit. After the drain is fully installed, test for proper drainage. If the unit does not drain properly, rectify this condition before proceeding with the installation. The Company is not responsible for removal and or reinstallation costs.

NOTE: Watertight installation of the drain is the installer's responsibility. Drain leakage is excluded from the warranty of this product.

Plumbing

All Monet Comfort Baths are factory tested for proper operation and watertight connections prior to shipping. If leaks are detected, notify your dealer. Do not install the unit.

Water Supply

Consult local authorities for plumbing code requirements in your area.

IMPORTANT: Proper installation of the fill spout plumbing and compliance with local codes are the responsibility of the installer. The Company does not warrant connections of water supply fittings and piping, fill systems, or drain/overflow systems. Nor is it responsible for damage to the bath which occurs during installation.

CAUTION: A nonflammable protective barrier must be placed between soldering work and bath unit to prevent damage to the bath.

Clean-Up After Installation

To avoid dulling and scratching the surface of the bath, never use abrasive cleaners. A mild liquid detergent and warm water will clean soiled surfaces.

Remove spilled plaster with a wood or plastic edge. Metal tools will scratch the surface. Spots left by plaster or grout can be removed if lightly rubbed with detergent on a damp cloth or sponge.

Paint, tar, or other difficult stains can be removed with paint thinner, turpentine, or isopropyl alcohol (rubbing alcohol).

Minor scratches which do not penetrate the color finish can be removed by lightly sanding with 600-grit wet/dry sandpaper. You can restore the glossy finish to the acrylic surface of the bath with a special compound, Meguiar's #10 Mirror Glaze. If that is not available, use automotive rubbing compound followed by an application of automotive paste wax.

Major scratches and gouges which penetrate the acrylic surface will require refinishing. Ask your dealer for special instructions.


Purging the Bath

If the bubble function is used, 60 minutes after the control has shut off (either with the ON/OFF button or at the end of a 20 minute cycle), the blower will come on for a 1 minute purge cycle to blow water out of the piping of the system. The led flashes during the 60 minute pause.

If the bath is used without the bubble function, turn the blower ON then Off. The blower will come on in 15 minutes for one minute.

A 24 hour purge cycle can be programmed to come on at the same time every day. To activate, hold the + button for 5 seconds when the blower/heater is off or waiting for the normal purge. The led will flash twice. If the unit is in standby for the normal purge when activating the 24 hour cycle, the normal purge will be cancelled. When the 24 hour purge is activated, the led will continuously flash (at a slower rate than during normal purge). The purge will come on at the same time every day as when it was activated. To cancel the 24 hour cycle, press the + button (led will stop flashing).

CONTROL PANEL OPERATION

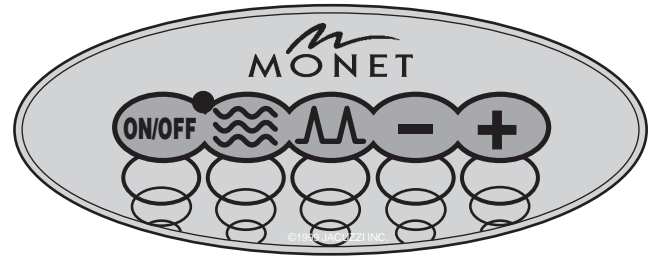

ON/OFF Normal Mode: Press this button to turn the blower ON. The indicator light will come on. The blower will be on for 20 minutes.

Wave Mode: Press this button to change the blower's power from a minimum to a user defined maximum. The indicator light's intensity changes smoothly showing this Wave mode. Press this button a second time to return to normal mode where the blower's power is constant.

Pulse Mode: Press this button to change the blower's power rapidly from the minimum to a user defined maximum. The indicator light flashes showing the Pulse mode. Press this button a second time to return to normal mode where the blower's power is constant.

In the Normal mode with the blower power constant, Press to increase (+) or to decrease (-). In Wave or Pulse mode these buttons change the blower's power to a user defined maximum.

Cleaning the Blower System

To remove accumulations of bath residue from the bubble system, we recommend that you purge it every 3 to 4 months. To do this, follow this simple procedure. Fill the bath with hot water (not exceeding 140°F). Add to the hot water 4 tablespoons of low foaming disinfectant. Turn the blower off. Let the bath sit for 5 to 10 minutes. Drain the bath completely and refill with cold water only. Run the blower for 5 to 10 minutes, then drain the bath completely.

Cleaning the Bath Surface

To clean your bath, simply use a mild, nonabrasive liquid detergent solution. You can protect and restore the gloss to a dulled acrylic surface by applying Meguiar's #10 Mirror Glaze, a product specifically designed for use on acrylic finishes. If Meguiar's is not available, an acrylic polish of equal quality or automotive paste wax is acceptable.

Never use abrasive household cleaners on any Monet product.

Repairs to the Surface

Minor scratches which do not penetrate the color finish can be removed by lightly sanding with 600-grit wet/dry sandpaper. Restore the gloss using Meguiar's Mirror Glaze or automotive paste wax.

Major scratches and gouges which penetrate the acrylic surface will require refinishing. Ask your Monet dealer for special instructions.

**PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
USE INSTALLATION INSTRUCTIONS SUPPLIED WITH PRODUCT.**

Monet has obtained applicable code (standards) listings generally available on a national basis for products of this type. It is the responsibility of the installer/owner to determine specific local code compliance prior to installation of the product. The Company makes no representation or warranty regarding, and will not be responsible for any code compliance.

Monet Comfort Baths
P.O. Box 702168, Dallas, TX 75370-2168
Service Support: (800) 288-4002

©2000 R589000 8/13/04



Printed on Recycled Paper

Printed in the U.S.A.

Monet Comfort Bath Limited Warranty

WARRANTY COVERAGE

Warranty Service Department (the Company) offers the following express limited warranty to the original purchaser of any Monet Comfort Bath ("unit") who purchases the product for personal or single family use ("user"). The Company will repair or replace, at its option, the unit or its equipment in accordance with the following terms and conditions. The terms of the warranty will be administered by Jacuzzi Whirlpool Bath.

TWO YEAR LIMITED WARRANTY ON BATHS

Our warranty on Monet Comfort Baths is for two (2) years. Our warranty covers the unit and factory-installed components (e.g., air pump, motor) against defects in material or workmanship. Warranty coverage begins on the date the unit was originally purchased by the user.

NINETY DAY (PARTS ONLY) LIMITED WARRANTY ON OPTIONS AND ACCESSORIES

Our warranty on options and accessories manufactured by the Company is for ninety (90) days for parts only. Our warranty covers options and accessories manufactured by the Company (e.g., fill spout kits) against defects of material or workmanship. Warranty coverage begins on the date the option or accessory was originally purchased by the user.

WARRANTY LIMITATIONS

Our warranty does not cover defects, damage, or failure caused by the common carrier, installer, user, or other person, or resulting from, without limitation, any of the following: careless handling (lifting unit by plumbing, abrading finish, etc.); modification of any type for any reason (including modification to meet local codes); improper installation (including installation not in accordance with instructions and specifications provided with the unit); connections supplied by the installer of the equipment; improper voltage supply or unauthorized electrical modification; misuse; incorrect operation, or lack of proper routine maintenance; operation of the unit without specified minimum amount of water or at inappropriate water temperature; use of abrasive or improper cleaners; or acts of God, such as lightning, floods, earthquakes, etc.

In addition, THE COMPANY WILL NOT BE RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES or losses arising from any cause (e.g., water damage to carpet, ceiling, loss of use, etc.) including its own negligence; damages to, respecting, or resulting from: optional bath equipment not manufactured by the Company, supplied by Dealer, installer or the Company; the unit's prior usage as an operational display; or defects that should have been discovered before installation. This limited warranty does not include: labor, transportation, or other costs incurred in the removal and/or reinstallation of the original unit and/or installation of a replacement unit; any costs relating to obtaining access for repair; or loss of use damage, including loss of sales, profit or business advantage of any kind under any circumstances. Bath units in commercial use are excluded from any warranty coverage if any addition, deletion, or modification of any kind whatsoever has been made to the unit (or to any component).

Warranty coverage is provided in the United States of America only.

IMPLIED WARRANTIES

Implied warranties of merchantability and fitness for a particular purpose are disclaimed altogether or to the full extent allowed by law.

NOTICE: This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. There are no warranties applicable to Monet Comfort Baths except as expressly stated herein or as implied by applicable state and federal laws. The Company will not be responsible for any statements or representations made in any form that go beyond, are broader than or are inconsistent with any authorized literature or specifications furnished by the Company.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

RETURN OF WARRANTY CARD

The attached Warranty Registration Card MUST be filled out by the purchaser within thirty (30) days from purchase and mailed in order for this warranty to become effective.



Monet Comfort Bath
P.O. Box 702168
Dallas, TX 75370-2168

RESPONSIBILITIES OF OTHERS

Inspecting the unit prior to installation is the responsibility of the installer or building contractor who acts on behalf of the user. They are responsible for ensuring the unit is free of defect or damage. Notices are placed on and in the unit and on the shipping carton advising the installer of this responsibility. In the event of a problem, the unit must not be installed. The Company is not responsible for failures or damage that could have been discovered, repaired, or avoided by proper inspection and testing prior to installation.

Damage occurring in transit is the responsibility of the carrier. The user or installer **MUST** open the crate and inspect the unit for damage when it is delivered. If damage is discovered, it must be reported immediately to the seller and the carrier in writing, and an inspection requested. Failure of the carrier to respond should be reported to the seller and the carrier. Your freight claims should be filed promptly thereafter.

It is the responsibility of the installer, building contractor, or user to provide access for service. The Company is not responsible for any costs relating to obtaining access for repair. The user shall bear such costs and, if appropriate, must seek recovery from the installer.

Damage occurring to the unit during installation is the responsibility of the installer and/or building contractor and damage occurring thereafter is the responsibility of the user.

Failure of any optional equipment is the sole responsibility of the equipment manufacturer. (Options and accessories manufactured by the Company are warranted for ninety (90) days from the original date of purchase for parts only.)

The Distributor or Dealer is responsible for knowing local code requirements and notifying the installing contractor and/or user of these requirements at the time of purchase. The Company is not responsible for costs to modify any product to obtain any code approval, such as city, county, or state building codes.

WARRANTY SERVICE

For the customer's benefit, the Company maintains a list of independent service personnel to perform required warranty service repairs. Such firms are not agents or representatives of the Company and cannot bind the Company by words or conduct.

The Company will provide the warranty service described above when the following conditions have been met: the failure is of the nature or type covered by the warranty; the user has informed an Authorized Service Agent or Warranty Service Department Representative of the nature of the problem during the warranty period; conclusive evidence (e.g., proof of purchase or installation) is provided to the foregoing by the user proving that the failure occurred or was discovered within the warranty period; an authorized independent service person or Company representative has been permitted to inspect the unit during regular business hours within a reasonable time after the problem was reported by the user.

In order to obtain warranty service, call the warranty service number below for the location of the nearest Authorized Service Agent or write:

Warranty Service Department
P.O. Box 702168
Dallas, TX 75370-2168
Call: 1-(800) 288-4002

To obtain warranty replacement for factory-installed components for Company supplied options and accessories manufactured and supplied by the Company, call or write the above. Provide a description of the problem and proof of purchase. You will be instructed how to obtain replacements and where to return, at your expense, the failed component(s), option(s), or accessory(ies).

All replacement parts, equipment, and repairs shall assume the remaining warranty period of the part(s) replaced.

The Company's warranty obligation shall be discharged upon tender of replacement or repair. The customer's refusal to accept the tender terminates the Company's warranty obligation

©2000 R589000 8/13/04

Warranty Registration Card

This card must be filled out and returned to the address printed on the other side within thirty (30) days from date of purchase in order for this warranty to be come effective.

Purchaser's Name _____

Purchaser's Address _____

City _____ State _____ Zip _____

Date of Purchase _____

Model Name _____

Serial Number _____

Dealer's Name _____

Dealer's Address _____

1. How did you first hear about this Monet® product?
 - Advertisement Article in Magazine/Newspaper
 - Visited Dealer/Plumbing Supplier Yellow Pages
 - Builder/Plumber/Remodeler Decorator/Architect
 - Visited Retailer/Home Center Store
 - Word of Mouth... Friend/Relative/Acquaintance
 - Other (Please Describe) _____
2. Who first gave you specific information about this product (specifications, prices, etc.)?
 - Dealer/Plumbing Supplier Builder Remodeler
 - Plumbing Contractor Retailer/Home Center Store
 - Decorator/Architect Already Installed
3. What was the main reason for purchase?
 - Styling Warranty Service Product Features
 - Brand Name Price Home Resale
 - Other _____
4. Who finally decided which product you would buy?
 - Self Spouse Self and Spouse Together
 - Other Family Member Designer/Architect
 - Builder/Plumber/Remodeler Already Installed
5. Who installed?
 - Contractor/Plumber when remodeling
 - Self/Spouse when remodeling
 - Other _____
6. What is the current market value of this property?

Please estimate \$ _____ years
7. What is the age of the head of the household? _____ years
8. What other manufacturers did you consider?
 - Eller Lasco Price Pfister Aqua Glass
 - Kohler American Standard Sterling
 - Other (Specify) _____
9. How long did you shop before purchasing unit?
 - 1 day 2 months-6 months
 - 2-7 days 6 months-1 year
 - 1 week-2 weeks 1 year-2 years
 - 2 weeks-4 weeks +2 years
 - 1 month-2 months
10. Approximately how long have you lived in this home?

household _____

11. Please indicate, approximately, the total annual income of your household.

 - Up to \$24,999 \$50,000 to \$74,999
 - \$25,000 to \$29,999 \$75,000 to \$99,999
 - \$30,000 to \$39,999 \$100,000 to \$149,999
 - \$40,000 to \$49,999 \$150,000 and Above
12. Was your purchase process?
 - Very easy Easy Difficult Very Difficult

Ninety-Day
Parts Only
Limited Warranty
On
Accessory(ies)

Ninety-Day
Parts Only
Limited Warranty
On
Accessory(ies)