


**Elara® Technical Specifications for 7236**

Letter	Description	SOAKING	PURE AIR® BATH	WHIRLPOOL	SALON® SPA	Each component requires a separate, dedicated GFCI protected circuit			
-	Drain/Blower/Motor Location	LH/RH Drain	LH/RH Drain/Right or Left Side Blower	LH/RH Drain/Right or Left Side Motor	LH/RH Drain/Right or Left Side Blower/Motor				
-	Drop-in Cutout Dimensions (L x W)	70" x 34" (1778 mm x 864 mm)					Model with components	GFCI Outlet (60Hz)	
-	Total Weight	1165 lbs (528 kg)	1211 lbs (549 kg)	1223 lbs (555 kg)	1233 lbs (559 kg)	SOAKING	Soaker only	None	
-	Floor Loading	65 lb/ft <sup>2</sup> (316 kg/m <sup>2</sup> )	67 lb/ft <sup>2</sup> (328 kg/m <sup>2</sup> )	68 lb/ft <sup>2</sup> (332 kg/m <sup>2</sup> )	69 lb/ft <sup>2</sup> (334 kg/m <sup>2</sup> )		Soaker w/ Chromatherapy	120V/15A	
-	Product Weight	101 lbs (46 kg)	147 lbs (67 kg)	159 lbs (72 kg)	169 lbs (77 kg)	PURE AIR® BATH	Blower	120V/15A	
-	Operating Gallons (Max)	97 Gal (367.1 L)					Chromatherapy (if available)	120V/15A	
-	Soaking Depth	17.7" (449.3 mm)					WHIRLPOOL	Motor/Pump	120V/20A
L	Outer Length	72" (1829 mm)						Heater (if available)	120V/15A
W	Outer Width	36" (914 mm)					SALON® SPA	Motor/Pump and Heater	240V/30A
H	Overall Height	26" (660 mm)						Blower	120V/15A
A	Overflow Height	18" (457 mm)							
B	Long Edge to Drain Center	10.25" (260 mm)							
C	Short Edge to Drain Center	18" (457 mm)							
D	Drain Shoe Length	8.2" (208 mm)							
E	Deck Height	0.63" (16 mm)							
F	Deck Width	4" (102 mm)							
G	Service Access Dimensions	12" x 18" (305 mm x 457 mm)							
I	Floor Cutout for Drain	12" x 6" (305 mm x 152 mm)							
J	Interior Dimensions (bottom of bath) L x W	51" x 22" (1295 mm x 559 mm)							

**KEY DIMENSIONS\* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]**

\*Right hand model shown. Left hand model is exact opposite.

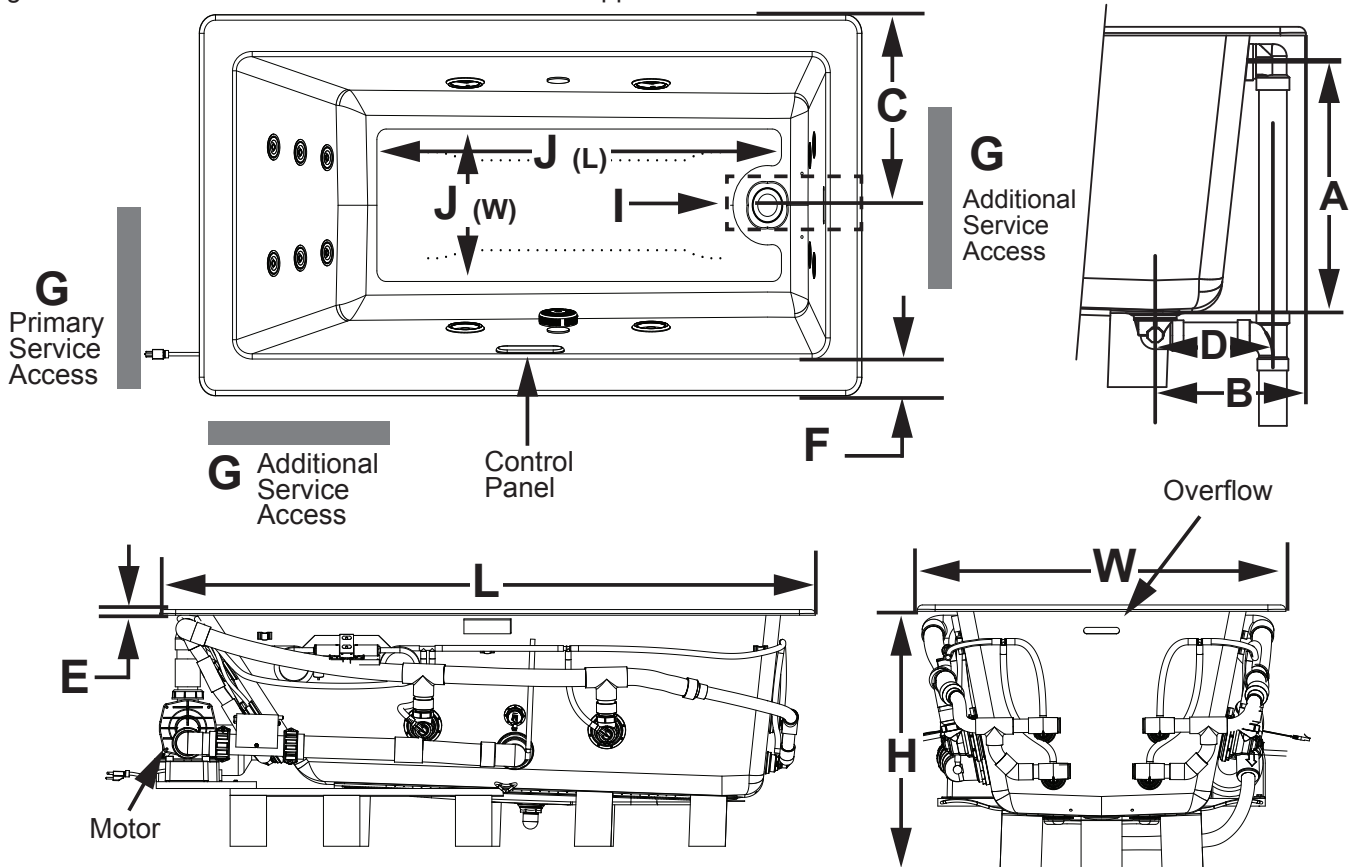

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE