


## Luxura® 6634 Bath Technical Specifications

Letter	Description	Soaker		Whirlpool		Each component requires a separate, dedicated GFCI protected circuit	
						Model with components	GFCI Outlet (60Hz)
-	Drain Location	LH/RH Drain					
-	Pump Location	LH/RH Pump					
-	Cutout Template	N/A					
-	Drop-in Cutout Dimensions (L x W)	64" x 32" (1625 mm x 813 mm)					
-	Total Weight	798 lbs (362 kg)		823 lbs (373 kg)			
-	Floor Loading	51lb/ft2 (250 kg/m <sup>2</sup> )		53lb/ft2 (258 kg/m <sup>2</sup> )			
-	Operating Gallons (Max)	58 gal (189 L)					
-	Product Weight - Empty	65 lbs (32 kg)		90 lbs (41 kg)			
-	Soaking Depth	16" (406 mm)					
L	Outer Length	66" (1676 mm)					
W	Outer Width	34" (864 mm)					
H	Overall Height	20" (508 mm)					
A	Overflow Height	15.25" (387 mm)					
B	Long Edge to Drain Center	8.25" (210 mm)					
C	Short Edge to Drain Center	16" (406 mm)					
D	Drain Shoe Length	5.25" (133 mm)					
E	Tile Flange Height	1" (25 mm)					
F	Deck Width	3.6" (91 mm)					
G	Service Access Dimensions	12" x 18" (305 mm x 457 mm)					
I	Floor Cutout for Drain	12" x 6" (305 mm x 152 mm)					
J	Interior Dimensions (JW x JL) Bottom of Bath	50.25" x 20.5" (1283 mm x 521 mm)					
K	Interior Dimensions (KW x KL) Top of Bath	57" x 25" (1448 mm x 635 mm)					
L2	Interior Depth - Drain End (D)	17" (432 mm)					
M	Backrest Angle	23°					

Model	Soaker Only	Whirlpool Model	GFCI Outlet (60Hz)
Soaker Model	Soaker Only		None
Whirlpool Model		Motor/Pump	120V/15A
		Heater	120V/15A

### Key Dimensions

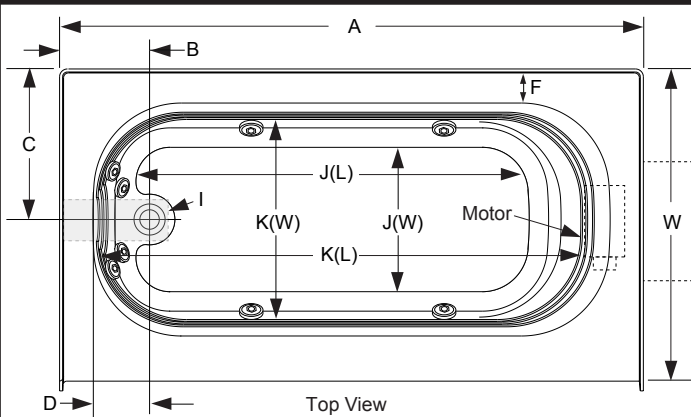

Product shows Luxura 6634 Bath Left-Hand Model.  
\*Measurements inside unit represent cutout in floor to allow for drain/overflow.

#### NOTE

The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).

\*Deck width reflects only area indicated on detail.

