

TECHNICAL SPECIFICATIONS



Nova™ 6 Plus Whirlpool Bath

NOV7242 WLR 2CJ Nova 6 Plus, Left Hand Whirlpool Bath (ES10)
 NOV7242 WRL 2CJ Nova 6 Plus, Right Hand Whirlpool Bath (ES20)

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

KEY DIMENSIONS

DIMENSIONS

72" L x 42" W x 20-1/2" H
 (1829 mm) L x (1067 mm) W x (521 mm) H

DRAIN/OVERFLOW

A: 14-3/4" (375 mm) B: 8-1/2" (216 mm)

CUTOUT

70" x 40" (1778 mm x 1016 mm)

TOTAL WEIGHT

1155 lb (525 kg) / 55 lb/ft² (268 kg/m²)

OPERATING GALLONAGE

70 U.S. Gal. (265 Liters)
 Min. 57 U.S. Gal. (216 Liters)
 Max. 82 U.S. Gal. (310 Liters)

PRODUCT WEIGHT

116 lb (53 kg)

SKIRT MOUNTING

Optional, U-Frame: #F958

ELECTRICAL SPECIFICATIONS

Requires a dedicated GFCI protected separate circuit.

Motor/Pump: 120 VAC, 15 AMP, 60 Hz.

RapidHeat™: 120 VAC, 15 AMP, 60 Hz.


HEATER (OPTIONAL)

Requires a dedicated GFCI protected separate circuit.

RapidHeat™: P/N S750000

FEATURES, UPGRADES & ACCESSORIES


- Left and Right Hand Drain Location
- Accessories / Hardware:
 - Trip-Lever Drain Kit #X559
 - Rotary Drain Kit, 26" Cable #8730
 - TheraPro Jet Trim Kit: #GU44
 - AccuPro Jet Trim Kit: #GU45 (3 kits required)
- Trim Kit Finishes Available:
 - (827) – Chrome
 - (826) – Brushed Nickel
 - (845) – Oil Rubbed Bronze

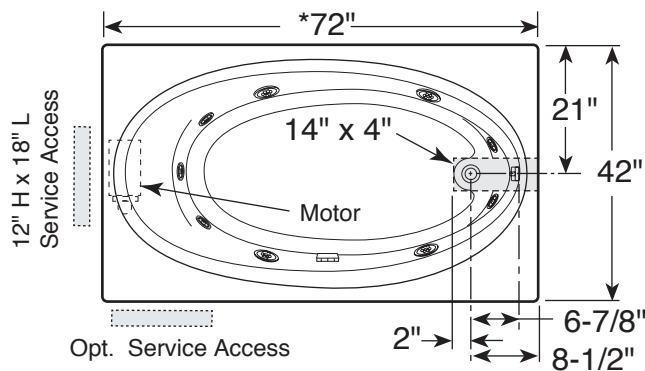


Product Shown: Nova 6 Plus, Right Front Motor Whirlpool Bath
 Model: ES10

* Measurements inside unit represent cutout in floor to allow for drain/overflow.


Minimum Service Access dimensions given.



SIDE VIEW

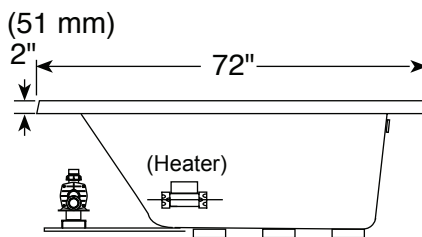

END VIEW



DRAIN/OVERFLOW