

Note: It is essential that construction materials are selected carefully.

Tile

We recommend **3/8" thick tile**. Provide a sample of the tile selected to your carpenter, plumber, and tile contractor. Communication between these contractors is **very important** in achieving a proper installation.


Underlayment

We recommend an underlayment of water-resistant tile backer board over a 3/4" minimum thickness exterior grade plywood. **Do not use** flake board, interior grade plywood, or other materials that are not water resistant.

Sink Installation

Note: Do not attempt to tile the countertop before setting the sink in place. Once the sink is set, adjustments can be made, if required, to compensate for variations in sink or tile dimensions.

Determine the location of the sink and reference the appropriate rough-in information on the back of this page for your specific model. Lay out your cutout using the illustration below as a guide.

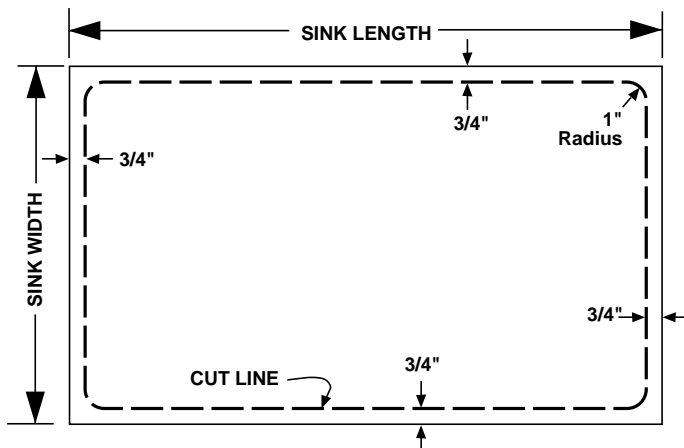

Once the cutout is made, set the sink in place.

Important Note: Once the sink is set in place, use a tile sample to determine if it will be necessary to shim the sink or rout the underlayment for a smooth transition to the tile. Remember that the tile adhesive will raise the tile slightly. The sink is designed so that when installed it should sit flush with or slightly below the surface of the tile.

Do not use grout between the tile and sink. Use latex or silicone sealant only.


Setting the Tile

If at all possible, lay out the tile so that there will be a minimum of cut edges adjoining the sink. Cut edges often are sharp and do not make the smoothest, most attractive transition. This is especially true if the sink

Kitchen Sinks, Bar Sinks & Lavatories


INSTALLATION INSTRUCTIONS

Read ALL instructions carefully before beginning installation.

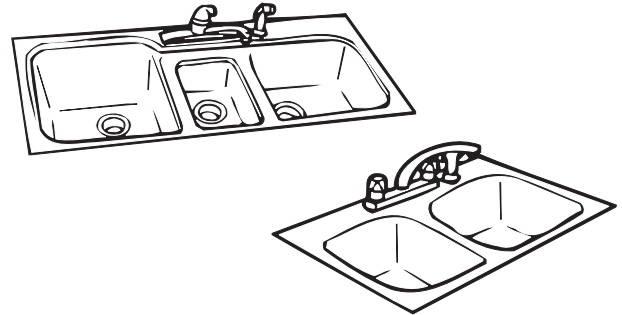

is slightly lower than the tile. If cut edges must adjoin the sink, make sure that the sharp edges have been smoothed.

The joint between the sink and the tile should be filled with a latex or silicone sealant, rather than grout. Grout can be cracked by vibrations from a disposal. It can also absorb moisture and cause rust.

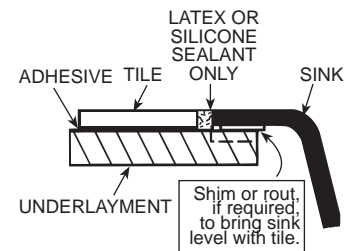

Care and Cleaning

For general cleaning, use a mild, nonabrasive soap and warm water. **Do not use** abrasive cleaners. Such cleaners contain sand or silica and will eventually scratch the enamel finish. Stains, surface specks, and pot marks should be removed without scrubbing by applying a paste of such cleaners as BARKEEPERS FRIEND or ZUD.

To prevent stains and scratches, rinse your sink thoroughly after each use. And when using stoneware dishes with unfinished bottoms, take care not to scratch the finish of the sink. Most kitchen sinks have optional baskets and racks that will protect the sink surface from stains and scratches. See your retailer or wholesale supplier for additional information for your model sink.

Avoid dropping heavy objects in or on your new sink. The enamel surface, while extremely durable, can be fractured. The damage usually expresses itself in the form of chips, shatters, or spider web cracks.

LIMITED WARRANTY

JACUZZI WHIRLPOOL BATH (“Jacuzzi Whirlpool Bath”, “we”, “us”, “our”), warrants to the original consumer/purchaser for the applicable warranty period set forth below, that the products we sell are free from defects in material and workmanship, except as otherwise indicated below.

PRODUCTS	WARRANTY PERIOD (commences upon date originally installed for its intended purpose)
• All cast iron sink products with porcelain enamel finish.	Limited lifetime vessel warranty to the original consumer/purchaser only. The porcelain enamel finish is warranted for one (1) year.
• 1.6 gpf/6 ltr. china toilets.	Five (5) years.
• All other china products and kitchen sink accessories.	Two (2) years.
• All toilet seats.	One (1) year.

ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THESE PRODUCTS IS LIMITED IN DURATION TO THE WARRANTY PERIOD SPECIFIED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.

This limited warranty does not cover:

- (a) damage to any products based on or resulting from improper installation or repair, misuse or abuse (including but not limited to excessive operating conditions), or alteration or adjustment other than in conformity with our specifications or instructions, whether performed by a contractor, service company or yourself;
- (b) damages resulting from failure to reasonably clean, care for or maintain a product in accordance with our instructions/recommendations; or,
- (c) any products we sell that have been moved or removed from their original installation site.

If you believe that a product fails to meet the above limited warranty, you should notify us in writing prior to expiration of the applicable warranty period set forth above at the following address: **Jacuzzi Whirlpool Bath, PO Box 702168, Dallas, TX 75370-2168**. Notification should include a description of the product, model number and how the product fails to meet the above warranty. Upon receipt of a written claim under this limited warranty and evidence of the date of purchase or installation, and after inspection by an authorized Jacuzzi Whirlpool Bath representative, at our option and in our sole discretion, we will either repair or replace the product with a Jacuzzi Whirlpool Bath product of the same or similar type and size; provided, however, that we will not pay any costs (labor or otherwise) associated with either removing a previously installed product; installing a replacement product; or transportation or return of a product.

JACUZZI WHIRLPOOL BATH WILL NOT BE LIABLE FOR ANY OTHER LOSS OR EXPENSE(S) NOT SPECIFICALLY DESCRIBED ABOVE, AND DISCLAIMS ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES.

SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE EXCLUSION MAY NOT APPLY TO YOU.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.