


**Elara® Technical Specifications for 6636**

Letter	Description	SOAKING	PURE AIR® BATH	WHIRLPOOL	SALON® SPA	Each component requires a separate, dedicated GFCI protected circuit			
-	Drain/Blower/Motor Location	LH/RH Drain	LH/RH Drain/Right or Left Side Blower	LH/RH Drain/Right or Left Side Motor	LH/RH Drain/Right or Left Side Blower/Motor				
-	Drop-in Cutout Dimensions (L x W)	64" x 34" (1626 mm x 864 mm)					Model with components	GFCI Outlet (60Hz)	
-	Total Weight	1088 lbs (493 kg)	1134 lbs (514 kg)	1146 lbs (520 kg)	1156 lbs (524 kg)	SOAKING	Soaker only	None	
-	Floor Loading	66 lb/ft <sup>2</sup> (322 kg/m <sup>2</sup> )	69 lb/ft <sup>2</sup> (335 kg/m <sup>2</sup> )	69 lb/ft <sup>2</sup> (339 kg/m <sup>2</sup> )	70 lb/ft <sup>2</sup> (342 kg/m <sup>2</sup> )		Soaker w/ Chromatherapy	120V/15A	
-	Product Weight	79 lbs (36 kg)	125 lbs (57 kg)	137 lbs (62 kg)	147 lbs (67 kg)	PURE AIR® BATH	Blower	120V/15A	
-	Operating Gallons (Max)	91 Gal (344.4 L)					Chromatherapy (if available)	120V/15A	
-	Soaking Depth	18.6" (472.1 mm)					WHIRLPOOL	Motor/Pump	120V/20A
L	Outer Length	66" (1676 mm)						Heater (if available*)	120V/15A
W	Outer Width	36" (914 mm)					SALON® SPA	Motor/Pump and Heater	240V/20A
H	Overall Height	26" (660 mm)						Blower	120V/15A
A	Overflow Height	18.9" (480 mm)							
B	Long Edge to Drain Center	10.63" (270 mm)							
C	Short Edge to Drain Center	18" (457 mm)							
D	Drain Shoe Length	8.5" (216 mm)							
E	Deck Height	0.63" (16 mm)							
F	Deck Width	4" (102 mm)							
G	Service Access Dimensions	12" x 18" (305 mm x 457 mm)							
I	Floor Cutout for Drain	12" x 6" (305 mm x 152 mm)							
J	Interior Dimensions (bottom of bath) L x W	44.25" x 20.75" (1124 mm x 527 mm)					*Heater circuit not required on units equipped with Whisper+ Technology™.		

**KEY DIMENSIONS\* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]**

\*Right hand model shown. Left hand model is exact opposite.

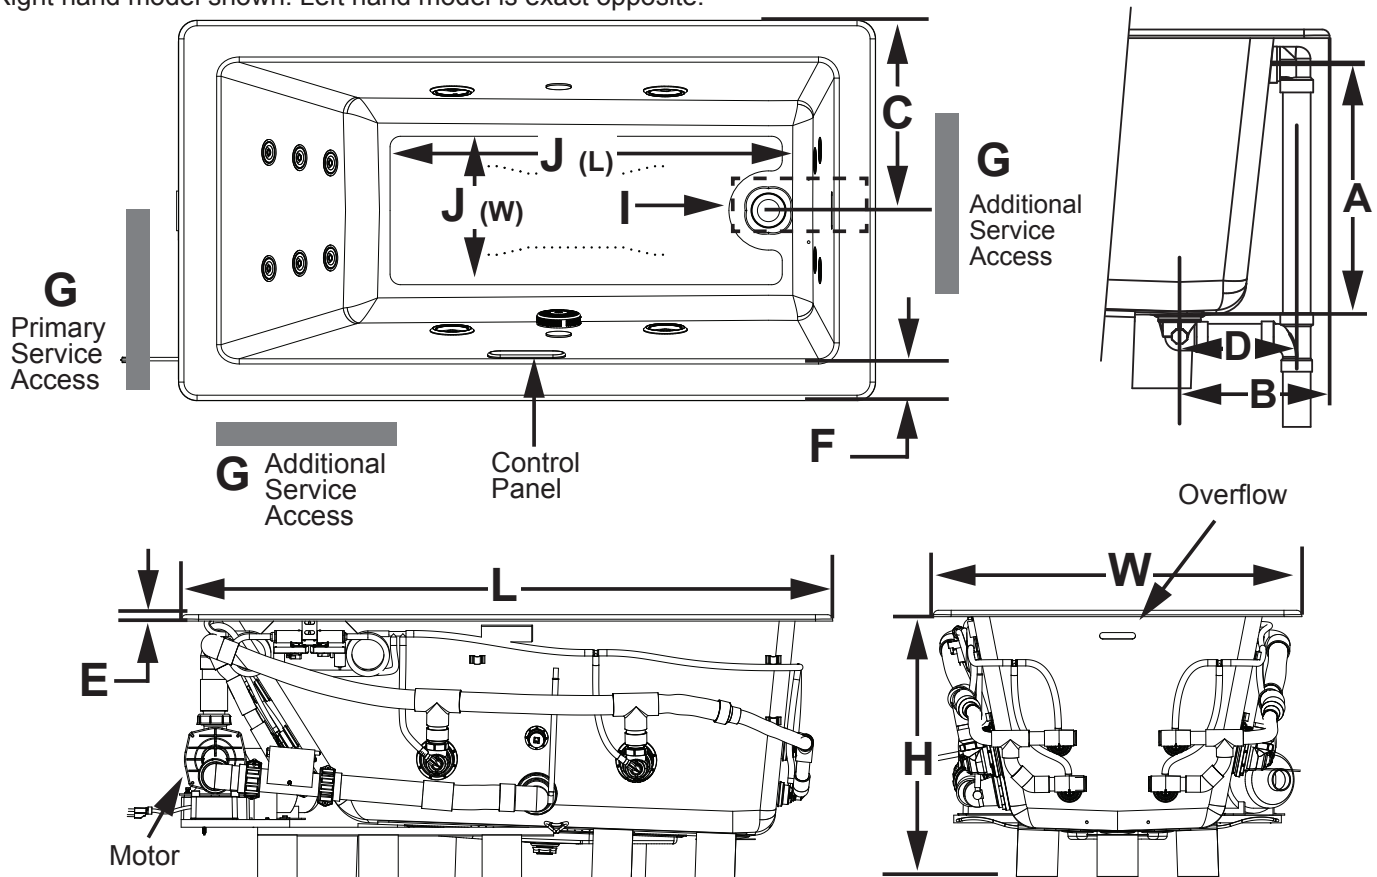

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE